Project:	
Catalog#:	
Notes:	Date:
Type:	

LED ARCHITECTURAL FULL CUT-OFF 5P WALL PACK

APPLICATIONS

- EXTERIOR WALLS
- FACTORY
- LANDSCAPING
- SCHOOLS
- CHURCHES
- HOTELS
- LOADING AREAS
- OFFICE BUILDINGS
- FOOD RESTAURANTS
- CITY HALL
- HISTORICAL AREAS
- OTHER OUTDOOR APPLICATIONS

KEY FEATURES

CONSTRUCTION

Full Cut-Off Wall Pack is a Slim Architectural LED Luminaire that boasts brilliant aesthetics. Sturdy die-cast Aluminum housing finished with Bronze corrosion-free powder coating. IP67 Rated for wet locations.

Optional: Custom Color

OPTICAL SYSTEM

Shatterproof Type I Optics come standard and projects light into a wide open space evenly. Fully sealed against dirt & bugs. Unique design feature sets the perfect light.

CERTIFICATION

UL/cUL and DLC Listed, FCC compliant; with LM79 & LM80, IP67 Rated, Dark Sky Compliant.

ELECTRICAL

Luminaire is Wattage 16W/32W/48W/64W/80W Field Selectable

Luminaire is Wattage 30W/60W/90W/120W/150W Field Selectable

High lumen efficacy 125lm/W, Non-Dimming, Isolated Driver

Universal 100-277VAC, 50/60Hz. Built-In Photocell (disconnectable)

Optional: 480V, EM Battery

INSTALLATION

Easy installation on standard junction box or surface mount. 2 total 3/4" Twistable Screw Knockouts for easy access to conduit. Flicker Free. 3CCT: 3000K/4000K/5000K switch. No CCT Tools Required.

WARRANTY

Industry leading Five (5) year manufacturer warranty in the USA.

ORDERING

MODEL NUMBER(S)

MODEL NUMBER	POWER	LUMENS PER WATT	5-WATTAGE SELECTABLE	3CCT TUNABLE	CRI	LIFE HOURS
LED-WPFC-5P80	16W/32W/48W /64W/80W Watts	125	2,320LM 4,640 LM 6,960 LM 9,280 LM 11,600 LM	3000K / 4000K / 5000K Field Switchable	80+	50,000
LED-WPFC-5P150	30W/60W/90W /120W/150W Watts	125	4,350 LM 8,700 LM 13,050 LM 17,400 LM 21,750 LM	3000K / 4000K / 5000K Field Switchable	80+	50,000

5P80 LED ARCHITECTURAL FULL CUT-OFF

PERFORMANCE DATA

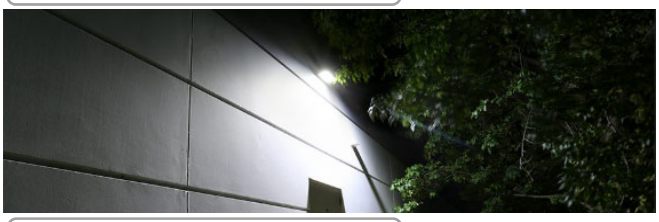

ACCESSORIES

DIMENSIONS

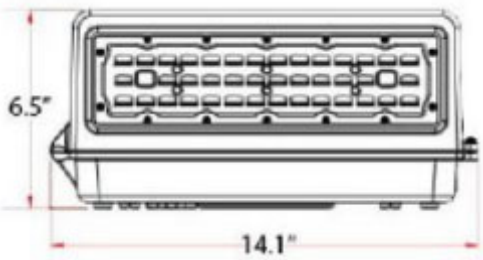



MODEL TECHNICAL SUMMARY

LED-WPFC-5P80	
INPUT WATTS	16W/32W/48W/64W/80W Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	125 lm/W
LED CHIPS	PHILIPS LUMILEDS 3030
LED DRIVER	CONSTANT POWER
DELIVERED UP TO LUMENS	11,600 LM
3CCT SWITCH	3000K / 4000K / 5000K
CRI	80+
WORKING TEMPERATURE	-30°C - +54°C
STORAGE TEMPERATURE	-30°C - +60°C
IP RATING	IP67
CERTIFICATION	UL CE FCC DLC Dark Sky
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	EM Battery Backup (90min.)
DIMMABLE	Non-Dimmable
BEAM ANGLE	60°
THD	<10%
POWER FACTOR	>0.88
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.10" * 6.50"* 9.25"

FEATURES

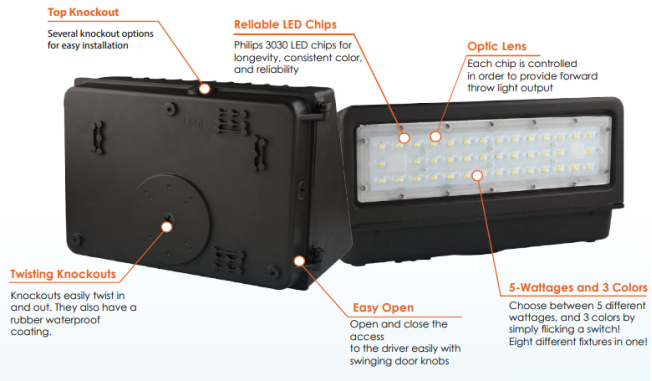

DLC LISTING

DLC LISTED PREMIUM

LED-WPFC-5P80-TRI-a-[PC;blank][BMS;RS;blank][S;blank]

Manufacturer: ENVISION LED LIGHTING, INC.
Brand: EnVision LED

PRODUCT OVERVIEW	
Classification	Premium
Primary Use	Outdoor Full-Cutoff Wall-Mounted Area Luminaires
Reported Input Wattage	80.37 W
Reported Light Output	9733 lm
Reported CCT	3000 K
Reported CRI (Ra)	84

PRODUCT INFORMATION	
Product ID	PLK6KOZFXY7O
Manufacturer	ENVISION LED LIGHTING, INC.
Brand	EnVision LED
Model Number	LED-WPFC-5P80-TRI-a-[PC;blank][BMS;RS;blank][S;blank]
Parent	No
Classification	Premium
DLC Family Code	CCCHGM

5P150 LED ARCHITECTURAL FULL CUT-OFF

PERFORMANCE DATA

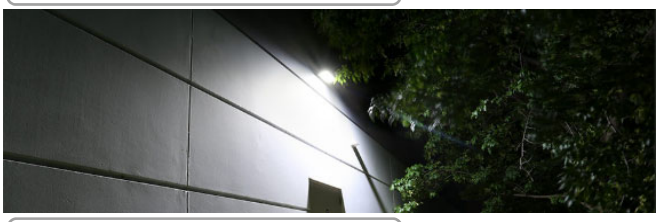

ACCESSORIES

DIMENSIONS

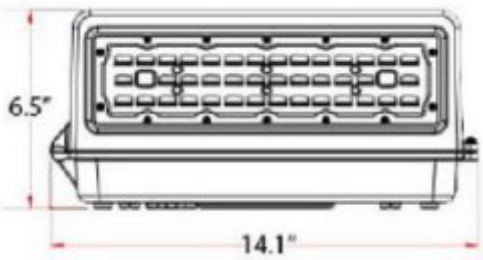



MODEL TECHNICAL SUMMARY

LED-WPFC-5P150	
INPUT WATTS	30W/60W/90W/120W/150W Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	125 lm/W
LED CHIPS	PHILIPS LUMILEDS 3030
LED DRIVER	CONSTANT POWER
DELIVERED UP TO LUMENS	21,750 LM
3CCT SWITCH	3000K / 4000K / 5000K
CRI	80+
WORKING TEMPERATURE	-30°C - +54°C
STORAGE TEMPERATURE	-30°C - +60°C
IP RATING	IP67
CERTIFICATION	UL CE FCC DLC Dark Sky
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	EM Battery Backup (90min.)
DIMMABLE	Non-Dimmable
BEAM ANGLE	60°
THD	<10%
POWER FACTOR	>0.88
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.10" * 6.50"* 9.25"

FEATURES

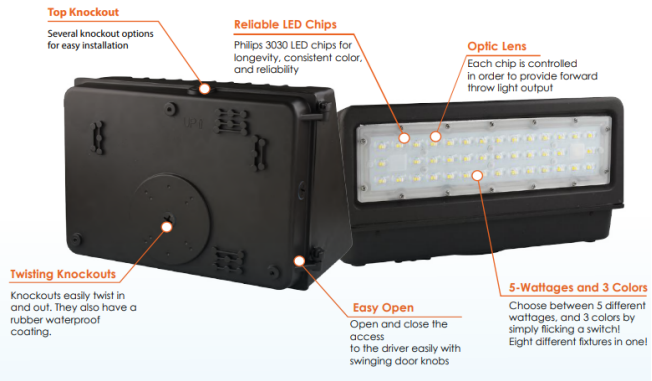

DLC LISTING

DLC LISTED PREMIUM

LED-WPFC-5P150-TRI-a-[PC;blank][BMS;RS;blank][S;blank]

Manufacturer: ENVISION LED LIGHTING, INC.
Brand: EnVision LED

PRODUCT OVERVIEW	
Classification	Premium
Primary Use	Outdoor Full-Cutoff Wall-Mounted Area Luminaires
Reported Input Wattage	154.72 W
Reported Light Output	18630.1 lm
Reported CCT	3000 K
Reported CRI (Ra)	84

PRODUCT INFORMATION	
Product ID	PLBQM8B8ISJS
Manufacturer	ENVISION LED LIGHTING, INC.
Brand	EnVision LED
Model Number	LED-WPFC-5P150-TRI-a-[PC;blank][BMS;RS;blank][S;blank]
Parent	No
Classification	Premium
DLC Family Code	CCCHGM